



HSM V-Press 605



HSM V-Press 605 vertical baling press

The HSM V-Press 605 reduces the volume of cardboard or foils in an economical way.

Technical data

Order number:	6112154	Loading aperture width x height:	800 x 495 mm
EAN	4026631056373	Bale length x Bale width x Bale height:	800 x 600 x 600 mm
Pressing power:	57 kN	Bale weight (up to):	70 kg
Specific pressing power:	11,85 N/cm ²	Noise level (idle operation):	ca. 55 dB(A)
Driving power:	1,5 kW	Width x Depth x Height:	1198 x 823 x 1986 mm
Voltage / Frequency:	400 V / 50 Hz	Weight:	485 kg
Cycle time when idling:	21 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	1,75 m ³ /h	Press material:	Punch waste/residue, Cardboard, Mixed paper, Plastic film
Loading height:	655 mm		

Product information



To fill the press, the upper half of the doors is swung to the right



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Special retaining claws optimize the compression of the pressing material and reduce the number of loading actions






Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

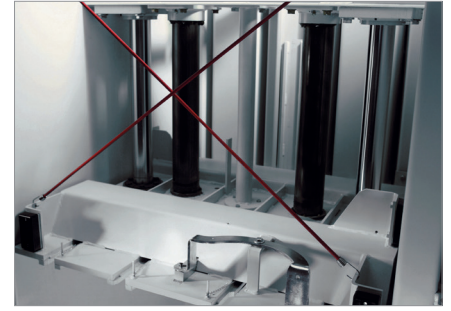

Optimized pressing

Massive press ram and extremely robust press plate guidance.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.

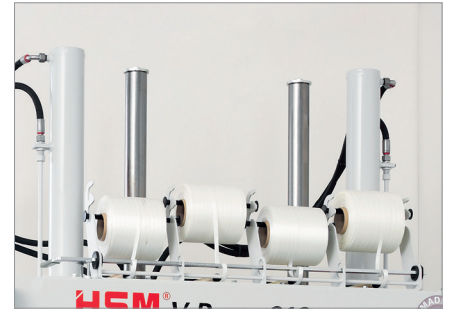

Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert