



# HSM V-Press 825



## HSM V-Press 825 plus vertical baling press

The HSM V-Press 825 is characterized by its very low transport height.

### Technical data

<b>Order number:</b>	6152244	<b>Loading aperture width x height:</b>	1195 x 530 mm
<b>EAN</b>	4026631056700	<b>Bale length x Bale width x Bale height:</b>	1200 x 780 x 700 mm
<b>Pressing power:</b>	250 kN	<b>Bale weight (up to):</b>	280 kg
<b>Specific pressing power:</b>	26 N/cm <sup>2</sup>	<b>Width x Depth x Height:</b>	1700 x 1046 x 2370 mm
<b>Driving power:</b>	4 kW	<b>Weight:</b>	1063 kg
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Strapping tape
<b>Cycle time when idling:</b>	39 s	<b>Press material:</b>	Punch waste/residue, Cardboard, Mixed paper, Plastic film, Clothing
<b>Volume throughput in idle operation (theor.):</b>	7 m <sup>3</sup> /h		
<b>Loading height:</b>	958 mm		

### Product information



To fill the press, the upper half of the doors is folded down



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Low installation height and small footprint




### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.

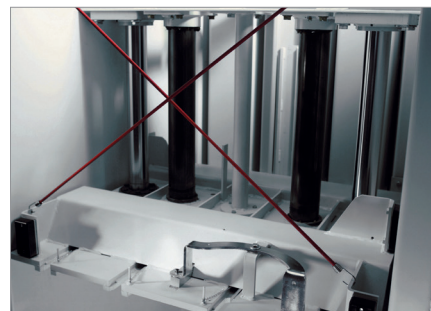

### Optimized pressing

Massive press ram and extremely robust press plate guidance.



### Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



### HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



### Strapping

Manual bale strapping with continuous polyester tape.



[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)