




# HSM VK 4012

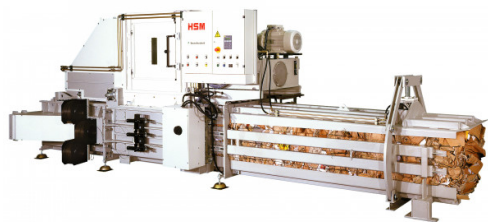

## Channel baling press HSM VK 4012

For industrial applications with special requirements - Throughput up to approx. 239 m<sup>3</sup>/h

### Technical data

<b>Order number:</b>	6406001	<b>Loading aperture width x Loading aperture length:</b>	820 x 1250 mm
<b>Pressing power:</b>	450 kN	<b>Bale width x Bale height x Bale length:</b>	900 x 720 x 600-1200 mm
<b>Specific pressing power:</b>	69,4 N/cm <sup>2</sup>	<b>Length x Width x Height:</b>	7043 x 3163 x 2350 mm
<b>Driving power:</b>	22 kW	<b>Weight:</b>	7 t
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Wire
<b>Cycle time when idling:</b>	12,2 s	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard
<b>Volume throughput in idle operation (theor.):</b>	239 m <sup>3</sup> /h		
<b>Volume throughput at 50kg/m<sup>3</sup> (theor.):</b>	11.95 t/h		

### Product information



Particularly suitable for compression of cardboard and plastic film



Versatile solution for materials up to approx. 40 kg /m<sup>3</sup> bulk weight



Very low space requirement thanks to compact and sturdy design





### **System solution**

Integration into automated industrial production processes.



### **Continuous loading**

Suitable for continuous loading with conveyor belt, air feeding or similar.



### **Optimized pressing**

High bale density and high bale weights.



### **Automatic operation**

Control of the pressing process via light barrier.



### **Operating side**

Can be fully integrated into existing workflows and processes. Operating side can be selected.



### **Variety of uses**

Suitable for almost all requirements. Contact us if you have other materials or applications. We will find you a suitable solution.

